Nero® Collection



We take the worry out of protecting what's valuable to you. Lockwood: no worries®





NERO® COLLECTION



Master the Mood with Lockwood

The Lockwood Nero Collection provides a sensuous quality that complements contemporary décor; adding a defining design element to any space.

Contents









143 Entrance Handle

page 4

Velocity® Large Rose

Element Lever

page 6

Velocity® Small Rose

Leversets

page 9

Velocity® Small Rose

Escutcheons

page 13



Cavity Sliding

Door Lock

page 15



FP2

Flush Pull

page 17



724 Series

Slide Arm Door Closer

page 19



Nexion® Mechanical

Entrance Lockset

page 21



Paradigm® 005

Double Cylinder Deadbolt

page 25

143 Entrance Handle



The Lockwood 143 Entrance Handle is constructed using the finest materials to incorporate the maximum standards in style, durability, finish and design.

Style and Variety

Combining fit for purpose with the epitome of style, the Lockwood 143 Entrance Handle offers a high quality solution to the requirements of both residential and commercial markets.

Packaging For Various Doors

Comes supplied with spigots to suit 10 – 12mm thick glass doors as well as aluminium and timber doors up to 50mm thick.

Application

Suitable for use on timber or aluminium frame as well as glass doors; making them the ideal choice for commercial, industrial and residential applications.

Multi Fix - timber, aluminium or glass doors

Product Details


Materials

Stainless Steel Construction: Constructed of 304 grade stainless steel, suitable for use in external environments

Standards and Compliance





Disabled Access - AS1428.1



143 Entrance Handle

143 Entrance Handle	
Part Number	143X600MBK
Fixing	
Timber	2 x 62mm M6 Bolts - 8.5mm hole
Glass	2 x 32mm M6 Bolts - 13mm hole
	Disabled Accessible AS1428.1

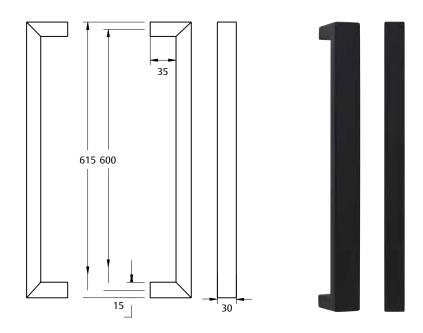

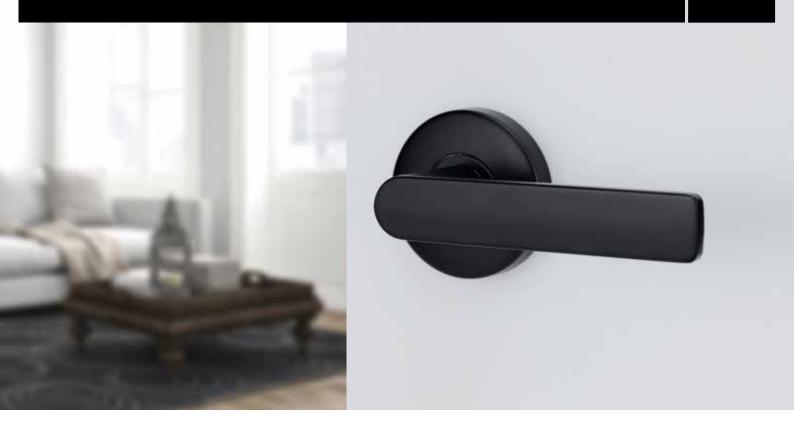


The Velocity Series is a stylish range of door furniture suitable for use in residential dwellings.

Designed to suit common door preparations in the Australian market, Velocity is ideal for both new and retrofit applications.

Retrofitable

Fits majority of doors with 54mm hole.



- 1 Align
- 2 Twist





Features and Specifications


- All fixings are concealed beneath a removable rose trim providing a crisp and clean presentation desired by the discerning home owner
- Simple twist and tighten fixing method with pre-assembled lever set allows for super easy and fast installation
- The rose fits 50mm or 54mm diameter holes making is suitable for retrofit and common door preparations
- Designed in Australia for the specific needs of the Australian market

Drad	LICT	110	tails
Prod	Tarana		lical III S

1 Todace Details		
Rose Dimensions	63mm by 12.5mm.	
Materials	Solid zinc die-cast with steel rose trims	
Latches	Passage sets are available with a 60mm backset tubular latch. Privacy sets are supplied with a 60mm backset privacy latch which includes an activating pin for the inside of the door and an external emergency release function. The latch is automatically released when the internal handle is operated and is easily adapted for both open in and open out applications. All latches are supplied with industry standard "D" strikes.	
Door Thickness	32mm to 45mm hinged doors	
Finishes	Matt Black (MBK)	

Standards and Compliance

D5 Tested to AS4145.2 2008 for Durability passing D5 - 100,000 cycles.




Not suited to coastal applications



Element[™]– Lever 3

Length 122mm
Projection 54.5mm
Finger Clearance 47.5mm





Passage Leverset

Part Number VEL1/L3MBK

Dummy Lever

Part Number VEL3/L3MBK



Privacy Leverset


Part Number VEL2/L3MBK



Square Rose Passage Trim

Part Number VES1-TRIMMBK


* Pack of 2



Square Rose Privacy Trim

Part Number VES2-TRIMMBK

* Pack of 2







The Velocity Small Series is a stylish range of door furniture suitable for both residential and semi-commercial applications. Designed primarily for new installation on timber doors, the range incorporates functionality for use with Mortice Locks in addition to Passage, Privacy and Dummy Levers.

Installation Suits door thickness range of 32mm to 45mm.











Features and Specifications

- · All fixings are concealed beneath a removable rose trim providing an aesthetically appealing installation
- Simple twist and tighten fixing method with pre-assembled lever set allows for super easy and fast installation
- Choose from two lever designs, the ever popular Element L3 lever and the AS1428.1 compliant Dianella L8 lever
- Accessories include AS1428.1 compliant turn, standard turn and privacy indicating emergency turns
- The 55mm rose suits up to 45mm door thickness commonly used with mortice locks or latches
- Designed in Australia for the specific needs of the Australian market

Product Details	
Rose Dimensions	55mm by 12.5mm - Round Rose 58mm by 12.5mm - Square Rose
Materials	Solid zinc die-cast lever with steel rose trims
Latches	Passage sets are available with a 60mm backset tubular latch. Privacy sets are supplied with a 60mm backset privacy latch which includes a locking pin for the inside of the door and an external emergency release function. The latch is automatically released when the internal handle is operated and is easily adapted for both open in and open out applications. All latches are supplied with industry standard "D" and "T" strikes.
Door Thickness	32mm to 45mm hinged doors
Finishes	Matt Black (MBK)



Successfully tested up to 2 hours on fire door assemblies in accordance with the Australian Standard AS1905.1 2005 -Part 1: Fire Resistant Doorsets when used with Lockwood Synergy or Selector mortice locks

D8

Tested to AS4145.2 2008 for Durability passing D8 - 500,000 cycles



Tested to AS4145.2 2008 for Neutral Salt Spray, passing C6 - 168 hours



AS1428.1 Compliance. The range includes AS1428.1 compliant levers and turns








Element[™] - Lever 3 Length 122mm Projection 54.5mm

47.5mm



Mortice Lock Leverset

Part Number VSR0/L3MBK

Passage Leverset

Finger Clearance

Part Number VSR1/L3MBK

Dummy Lever

Part Number VSR3/L3MBK




Privacy Leverset

Part Number VSR2/L3MBK



Dianella™ - Lever 8 Length 121mm Projection 51mm Finger Clearance 38mm Disabled Accessible AS1428.1



Mortice Lock Leverset		
Part Number	VSR0/L8MBK	

Passage Levei	rset	
Part Number	VSR1/L8MBK	



Privacy Leverset	t
Part Number	VSR2/L8MBK



Square Rose Passage Trim

Part Number

VSS1-TRIMMBK

* Pack of 2




Square Rose Privacy Trim

Part Number


VSS2-TRIMMBK

* Pack of 2




Part Number VSR5/MBK Height 55mm Depth 12.5mm Supplied with

2x Wood Screws






Oval Cylinder Escutcheon		
Part Number	VSR6/MBK	
Height	55mm	
Depth	12.5mm	
Supplied with 2x Wood Screws		






Standard Turnknob	
Part Number	VSR7/MBK
Height	55mm
Depth	12.5mm
Handing	Not required
Supplied with 2x Wood Screws 1x Short Tail Bar 1x Medium Tail Bar 1x Tail Bar Spring 1x Instructions (1220-321)	





Privacy Indicating Emergency Turn		
Part Number	VSR8/MBK	
Height	55mm	
Depth	12.5mm	
Supplied with		







1x Instructions (1220-321)

Disabled Accessible Turnknob		
Part Number	VSR9/MBK	
Height	55mm	
Depth	12.5mm	
Turn Snib Length	52mm	
Handing	Site handable	

52.0



Supplied with

2x Wood Screws

1x Tail Bar (short)

1x Tail Bar (medium)

1x Tail Bar Spring

1x Instructions (1220-321)

Square Rose Es	cutcheon Trim
Part Number	VSS6-TRIMMBK

* Pack of 2



Cavity Sliding Door Lock



The Lockwood sliding door lock range is possibly the most innovative and aesthetically pleasing lock for a cavity sliding door in Australia. Combining elegance and ease of use, the Lockwood Cavity Sliding Door Lock range is ideal for any home décor and security solution.

Currently available with the privacy latch model, offering the perfect solution for residential bathroom sliding doors.

Features and Specifications

 Fitted flush against the panel of the sliding door for full recess into the door cavity

Retractable door pull

Designed after extensive research, the sliding cavity door lock features an innovative retractable door pull which combines style with functionality.

Product Detail	s
Cross Drill	25mm
Door Thickness	32* to 40mm for timber doors *Requires spacer ring (included)
Finishes	Matt Black (MBK)
Latch Backset	60mm
Prep Hole	54mm
Strike	Box strike or pip strike (passage)
Materials	Furniture plate: Zinc Alloy Bolt: Nickel Plated Zinc (12.4mm projection) Bolt Beak: Stainless Steel Front End Plate: Stainless Steel Retractable Door Pull: Zinc Plated Strike Plate: Stainless Steel Strike Box: Zinc Plated

Cavity Sliding Door Lock

7400 Privacy Set


Part Number Finish
7400MBKDP Matt Black

Outside

Emergency release button opened by coin or screwdriver

Inside

Locked or unlocked by turn-plate

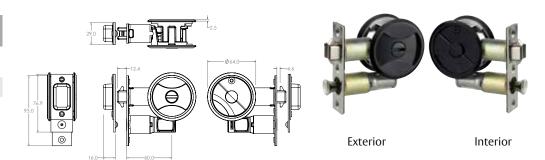

FP2 Flush Pull



The Lockwood Nero® Flush Pull offers multiple solutions for flush mount door furniture.

Application

Suited to numerous applications which require the door furniture to be flush with the surface of the door.

Product Details

Materials Zinc Stainless Steel

Standards and Compliance

C6


These products have been successfully tested in accordance with AS 2331-3.1: 2001. Neutral Salt Spray Test (NSS TEST). Passing C6 Corrosion Resistance - 168 hours

FP2 Flush Pull



Features and Specifications

- Stainless steel flush pull
- Trade packed, complete with fixing screws





724 Series Slide Arm Door Closer



The Lockwood Rack & Pinion Slide Arm Series provides for a cleaner, more aesthetic appearance on the door whilst utilizing the same robust features and benefits of Rack and Pinion functionality.

Specifications	
Power	EN adjustable 2 to 4
Back check (BC)	Adjustable
Hold Open	Adjustable. Hold-open can be set at any angle up to 150° of opening
Handing	Non-handed. Suitable for left or right hand doors
Cover	Clip-on
Materials	Extruded aluminium body manufactured from high-performance silicon alloy
Mechanism	Rack and pinion design
Mounting	Regular, parallel and over-door
Valves	Adjustable closing and latching speed valves with overload protection.

Standards and Compliance

Tested on fire door assemblies up to 4 hours in accordance with Australian Standard AS1905.1- 1997, Part 1: Fire Resistant Doorsets The Lockwood 724SR series closer has been successfully tested upto four hours (depending on type of doorset) on fire door assemblies in accordance with Australian Standard AS1905.1:2005, Part: Fire Resistant Door sets.



Note: Hold open option is not approved on any fire door.




724 Series Slide Arm Door Closer

724SR Slide Arm Pull Side

Part Numbers

724SRBLK

Closer installed on pull side of door. This mounting position permits opening of 130°.

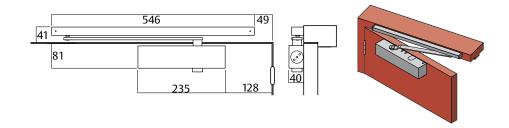



7724SR Slide Arm Push Side

Part Numbers

724SRBLK

Closer installed on push side of door. This mounting position permits opening of 115°.







7724SR Slide Arm Over Door Mounting Push Side

Part Numbers

724SRBLK

Closer installed on push side of door and top rail where conditions do not allow parallel mounting. This mounting position permits opening of 115°.





The Nexion Entrance Lockset represents the next generation in home security.

Designed and manufactured to the highest standards of quality, the Lockwood Nexion has set the benchmark for safety, security and style. The Nexion offers the ultimate protection for your home and family.

Features and Specifications

- Three mode security: Secure, Safety and Passage mode provides excellent security without compromising convenience
- LockAlert® indicator shows lock status at a glance
- SafetyRelease™ automatically unlocks the inside handle upon entry to minimise the risk of being locked in
- High security latch
- Box strike with concealed crossgrain door frame strengthening screw
- Can be keyed alike to other Lockwood door locks as well as builder's key systems

Product Detai	ls
Backset	60mm as supplied 70mm optional (order part 530-222SC)
Case	High purity zinc alloy
Door Thickness	35 to 45mm
Finishes	Matt Black (MBK)
Handles	Element Lever 3
Latch	13mm projection brass bolt
Strike	Box strike with concealed crossgrain door frame strengthening screw
Templates	Installation template included
Handing	Adjustable handing by set screw
Cylinder	Internal and external 5 pin tumbler mechanism with 6 pin capability Brass cylinders and brass barrels

Standards and Compliance

A

to suit fire door sets with a fire resistance level of up to 1 hour on fire door assemblies in accordance with Australian Standard AS1905.1:2005 Fire Resistant Doorsets. The fire rated option is achieved with a standard Nexion Vision Entrance Lockset and the optional fire rated kit (order NXVFRKIT).

The locksets can be optioned

SL7 (Security) Australian Lock Standard (AS4145.2.2008)

D8 (Durability) Australian Lock Standard (AS4145.2.2008)

(Corrosion) Australian Lock Standard (AS4145.2.2008)

CE Approved

C

C-tick certified




Keying


- Supplied individually keyed with two keys per lock
- 78,000 key combinations
- Key blank KB2015P

Restricted Special Keying
Lockwood locks can be keyed to a
number of controlled and/or specially
keyed systems. These range from legally
protected keys to protect against
unauthorised duplication, which can
also include specially designed key
systems such as master key systems,
which allow for different levels of
mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

Latch Dimensions







Kinetic Defence® Bump and pick resistant.



Deadlatch Bolt 13mm projection brass bolt.



SafetyRelease™ Minimises the risk of being locked in.



2 Keys Included

Can be keyed alike to other Lockwood door locks.



LockAlert®

Interior Indicator shows lock status at a glance.



Quick Installation

Suitable for door thicknesses between 35–45mm.



Safety Mode

Securely locked from outside and free from inside.



Retrofitable

Fits majority of doors with 54mm hole.



Secure Mode


Securely locked from both inside and outside. For when nobody is home.




Passage Mode

Free to enter from outside and free to exit from inside.

Nexion Vision - Double Cylinder

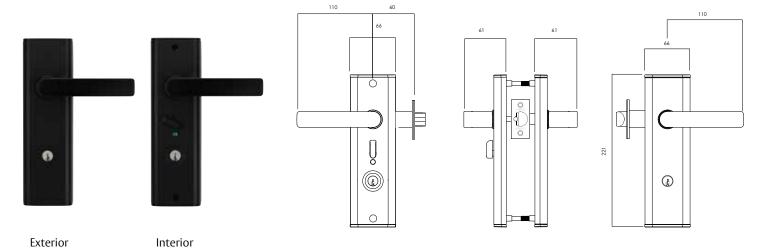


Ordering Procedure



		Options
2	-	1
Cylinders		
Double		2
Application	ı Op	otions
Timber Frame	e Str	ike* 1

App.

^{*} Metal Frame T-Strike optional (order part NX8/40SC)





Keying	
Keyed to Differ (Standard)	_
Keyed Alike 5 Pins	5KA
Project Keyed 5 Pins	5PK
Restricted Profile 5 Pins	5RP
Keyed Alike 6 Pins	6KA
Project Keyed 6 Pins	6PK

^{*} For Fire Rated Nexion Vision option (order part NXVFRKIT)



The Paradigm® 005 Double Cylinder Deadbolt is the premium security solution with its innovative safety features. The contemporary styling can be combined with any lever or entrance handle to create an elegant security solution, ideal for residential and architectural applications.

Key Features

- Three function modes with DualSelect® provides combination of convenience and security
- High security cut resistant stainless steel bolt
- Safety Release™ automatically unlocks internal knob upon key entry from outside
- LockAlert® indicator shows lock status at a glance
- Available in round or square rose


Restricted Special Keying

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 32-48mm door thickness.




Product Deta	ils
Backset	60 to 70mm adjustable stainless steel bolt
Bolt	High security, cut resistant stainless steel bolt
Cylinder	5 pin tumbler mechanism Brass cylinder and brass barrel
Door Thickness	32–48mm 32–36mm doors require a spacer (Included)
Finishes	Matt Black (MBK)
Keying	Supplied individually keyed with two keys per lock, 78,000 key combinations, Key blank KB2015P
Materials	High purity zinc alloy
Strike	Box strike with concealed crossgrain door frame strengthening screw


Standards a	and Compliance
SL8	(Security) Australian Lock Standard (AS4145.2 - 2008)
D8	(Durability) Australian Lock Standard (AS4145.2 - 2008)
C6	(Corrosion) Australian Lock Standard AS4145.2 - 2008)
K5	(Key Security) Australian Lock Standard AS4145.2 - 2008)


Round Rose











Exterior

Interior

*32–36mm door thickness requires spacer ring (included)



Kinetic Defence®

Bump and pick resistant.



Counterbalance Bolt

Proportionally distributes the load between the door and door frame.



DualSelect®

Turn the key for safety mode. Turn the key further to select secure mode.



2 Keys Included

Can be keyed alike to other Lockwood door locks.



SafetyRelease™

Minimises the risk of being locked in.



Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 32-48mm door thickness.



Anti-Corrosion

Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.



LockAlert®

Interior Indicator shows lock status at a glance.



Safety Mode

Securely locked from outside and free from inside.



Secure Mode

Securely locked from both inside and outside. For when nobody is home.




Passage Mode


Free to enter from outside and free to exit from inside.


Square Rose











Exterior

Interior

*32–36mm door thickness requires spacer ring (included)



Kinetic Defence®

Bump and pick resistant.



Counterbalance Bolt

Proportionally distributes the load between the door and door frame.



DualSelect®

Turn the key for safety mode. Turn the key further to select secure mode.



2 Keys Included

Can be keyed alike to other Lockwood door locks.



$Safety Release^{\scriptscriptstyle \mathsf{M}}$

Minimises the risk of being locked in.



Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 32-48mm door thickness.



Anti-Corrosion

Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.



LockAlert®

Interior Indicator shows lock status at a glance.



Safety Mode

Securely locked from outside and free from inside.



Secure Mode


Securely locked from both inside and outside. For when nobody is home.



Passage Mode

Free to enter from outside and free to exit from inside.

Ordering Procedure



DP	
Packaging	
Universal Pack	DP
Trade Pack	
Keying Options	
	tial
Special Keying-Residen Keyed Alike 5P	tial 5KA
Special Keying-Residen	
Special Keying-Residen Keyed Alike 5P	5KA
Special Keying-Residen Keyed Alike 5P Keyed Alike 6P	5KA 6KA

Packaging

^{*} For keying options please contact customer service.



Lockwood is the leading brand in the Australian locking industry. With an established reputation for high quality products, this iconic brand provides a wide range of locking solutions to residential housing, commercial, semi-commercial, building and industrial application markets. Lockwood is supported by an extensive distribution and after-sales support network. Our customers include retailers, architects, trade and industrial personnel, locksmiths and security dealers.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

ASSA ABLOY is represented in all major regions, in both mature and emerging markets, with leading positions in Australia, Europe and North America.



The Lockwood 25 Year Mechanical Warranty

Our belief that we manufacture the finest premium products available in today's market place is backed by the Lockwood 25 Year Mechanical Warranty, ensuring that Lockwood continues to keep Australians safe by delivering security and peace of mind.

For warranty terms and conditions, please visit www.lockweb.com.au or call 1300WARRANTY

ASSA ABLOY Australia Pty Ltd 235 Huntingdale Road Oakleigh, Victoria, 3166 Australia

1300 LOCK UP (1300 562 587) lockweb.com.au

ASSA ABLOY New Zealand Ltd 6 Armstrong Road Albany, Auckland, 0632 New Zealand

info.nz@assaabloy.com Telephone +64 9415 7111 assaabloy.co.nz



30 Byass Street Shepparton 03 5821 7277

Disclaimer

Whilst every effort has been made to ensure that the information (including product images and drawings) contained in this brochure is accurate at the time of publication,
ASSA ABLOY Australia Pty Limited ("ASSA ABLOY") recommends that you consult ASSA ABLOY or its agents prior to placing an order to ascertain current information on specific products,
as ASSA ABLOY reserves the right to make changes without notice. ASSA ABLOY will not be liable for any injury, loss or damage whatsoever, arising from any errors or omissions in the
information contained in the brochure or arising from the use or application of the information contained herein. © 2018 copyright by ASSA ABLOY All rights reserved

