

# Product Catalogue

Experts in sealants, adhesives  
& PU foams



## ALL PURPOSE SILICONE



### DESCRIPTION

For all sealing, waterproofing and bonding applications where protection against mould and mildew is required. The ultimate all rounder silicone suitable to the broadest range of applications. Offers strong adhesion to ceramics, glass, aluminium (including powder coated & anodised), PVC, stainless steel, zinc & galvanised coated surfaces, timber, concrete, fibreglass, laminate, painted surfaces, etc. Suitable for contact with drinking water as tested to AS 4020 (clear only). For best performance clean non-porous surfaces with Soudal Cleaner & Degreaser.

### APPLICATIONS

A high quality, flexible, neutral cure silicone suitable for a wide range of applications including

- Bathrooms & Kitchens for sealing baths, sinks, toilets, showers, tiles, plumbing fixtures, glass, tiles, etc.
- Roofs & Gutters for sealing of guttering, flashings, cladding, roofing, down pipes, ducting, lap joints, sheet metal, etc, available in matching Colorbond® metal.
- Windows & Glazing for sealing around windows, display cabinets, frames and architraves, etc.

### FEATURES & BENEFITS

- Quality neutral cure
- Roof & gutter
- Kitchen & bathroom
- Glass & glazing
- Mould resistant



Color		Size	Item Code	Matching Colorbond Colour
Clear		300 mL	121662	NA
Brilliant White		300 mL	121661	Colorbond White Haven
Titanium		300 mL	127785	Colorbond Surf Mist
Alabaster		300 mL	121671	NA
Ivory		300 mL	121664	Colorbond Classic Cream
Beige		300 mL	121663	Colorbond Paperbark
Stone		300 mL	121669	Colorbond Gully
Taupe		300 mL	127786	Colorbond Jasper

Color		Size	Item Code	Matching Colorbond Colour
Grey		300 mL	121665	Colorbond Dune
Cement Grey		300 mL	131649	NA
Medium Grey		300 mL	131648	NA
Dark Grey		300 mL	121666	Colorbond Windspray
Aluminium		300 mL	121660	Colorbond Citi
Pewter		300 mL	121667	Colorbond Woodland Grey
Charcoal		300 mL	121668	Colorbond Monument
Black		300 mL	121995	Colorbond Night Sky

COLORBOND®, BlueScope and \* colour names are registered trademarks of BlueScope Steel Limited.

™ Colour names are trademarks of BlueScope Steel Limited.

## MULTIBOND SMX35 – SEAL & STRETCH



### DESCRIPTION

Multibond SMX35 is a high quality, single component, permanently flexible joint sealant. Perfect for internal & external applications. Based on SMX® Polymer Multibond SMX35 has a "Shore A" hardness of 35 and can accommodate movement of  $\pm 20\%$ . Multibond SMX35 has excellent UV resistance, elasticity and can be sanded and painted with most types of paint. Once cured forms a strong, flexible, waterproof seal and bonds to the widest range of substrates. Multibond SMX35 can be used for damp surfaces.

### APPLICATIONS

Multibond SMX35 – Flex & Seal is ideal for a wide range of sealing applications in construction and industrial including.....

- Expansion joints
- Joints under waterproofing membranes (water-based, solvent-based and acrylic)
- Masonry and precast concrete joints
- For sanitary, bathroom and kitchen areas (resists mould growth)
- For walls and perimeter joints
- For water retaining structures (Concrete Grey water potable approved)
- For lap joints in roofing, guttering and cladding,
- For air conditioning ducting,
- For caravan, bus and automotive use
- For window and door frames

### FEATURES & BENEFITS

- Elastic sealant
- Highly flexible  $\pm 20\%$
- Internal & external
- **Easy to gun**
- UV Resistant



Colour		Size	Item Code
Concrete Grey		290ml 600ml	124605 124618
White		290ml 600ml	124604 124598
Black		290ml 600ml	124620 124619
Beige		600ml	124789
Dark Grey		600ml	124790
Sandstone		600ml	124787
Off White		600ml	124788



## BATHROOM & KITCHEN SILICONE



### DESCRIPTION


For all sealing, waterproofing and bonding applications where protection against mould and mildew is required. Offers strong adhesion to glass, tile, ceramics, aluminium, metals (including powder-coated & anodised), painted surfaces, fibreglass, stainless steel.

### APPLICATIONS

A quality, flexible, neutral cure silicone suitable for a wide range of applications including sealing baths, sinks, toilets, showers, tiles, plumbing fixtures, glass, tiles, etc.

### FEATURES & BENEFITS

- Neutral cure
- Mould resistant
- Highly flexible  $\pm 25\%$
- **Superior adhesion**
- Easy to smooth & finish
- Non corrosive

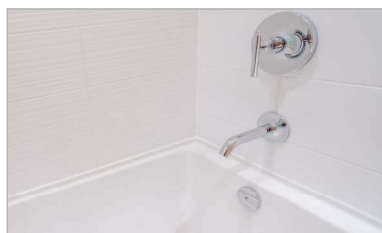

Colour		Size	Item Code
Clear		300ml	127784
White		300ml	127783

## ROOF & GUTTER SILICONE



### DESCRIPTION

For all sealing, waterproofing and bonding applications where protection against exterior conditions is required. Offers strong adhesion to aluminium (including powder-coated & anodised), PVC, roof tile, stainless steel, zinc & galvanised coated surfaces, etc.

### APPLICATIONS

A quality, flexible, neutral cure silicone suitable for a wide range of applications including sealing for roofing, guttering, flashings, cladding, down pipes, ducting, lap joints, sheet metal including Colorbond®, etc.

### FEATURES & BENEFITS

- Neutral cure
- Non corrosive
- Highly flexible  $\pm 25\%$
- Excellent UV Resistance
- Waterproof
- **Water potable tested**



Colour		Size	Item Code
Clear		300ml	127779
Grey		300ml	127778

## WATER RESISTANT PVA WOOD GLUE



### DESCRIPTION

A one component, humidity resistant, cross-linking, interior and exterior PVA wood adhesive that fulfils the requirements for long term high bond strength. Water resistant to class D3 (EN204/5).

### APPLICATIONS

Suitable for bonding of wood products, MDF, particle board, Formica, veneers, oak and tropical hardwood. All interior and exterior applications, which are not exposed to weather. Interior applications with frequent short-term exposure of the bonds to running or condensed water. Interior applications with long-term exposure of the bonds to high humidity. Exterior applications which are not exposed to weather. Manufacturing of door and window-frames that need to meet class D3 according to EN204.

### FEATURES & BENEFITS

- Easy application
- Transparent when dry
- High bond strength
- **Fast drying**
- Resistant to high temperature



Colour		Size	Item Code
White	<input type="checkbox"/>	250ml	129183
		500ml	129184
		1L	117245
		5L	116946

## WATERPROOF PU ADHESIVE



### DESCRIPTION

Waterproof PU Adhesive which foams up slightly during curing to fill gaps. Extremely high strength, rigid once cured. It will set hard in about 3 hours and even bonds to wet surfaces. Excellent resistance to solvents and chemicals.

### APPLICATIONS

Waterproof PU Adhesive can be used to bond most types of wood (soft, hard) laminate, polystyrene foam, PU foam and glass wool to porous surfaces. Also adheres to metal, stone, ceramics, porcelain, glass, concrete, brick, masonry and most plastics (Not PE, PP). Typical areas of use include window and door frames, wood jointing and construction, staircases, ladders, boat building, general household repair, hobby use and much, much more. Interior applications with frequent long-term exposure to running or condensed water. Exterior applications with exposure to weather influences. Manufacturing of door and window-frames that need to meet class D4 according to EN204. Substrates should be clamped during 180 minutes for best adhesive performance.

### FEATURES & BENEFITS

- **Water resistance D4**
- Professional Quality
- Foaming Penetration
- Extreme bond strength
- Suitable for wet timber



Colour		Size	Item Code
Brown	<input type="checkbox"/>	750gr	130318

## FILL & PAINT GAP FILLER



### DESCRIPTION

Fill & Paint is a professional quality, paintable, acrylic gap filler that cures to form a durable, flexible seal. Fill & Paint is a general purpose interior / exterior gap filler that remains flexible. Fill & Paint has a smooth finish with low shrinkage and has good adhesion to most common building materials including wood, MDF, particle board, plywood, fibre cement sheet, plasterboard, concrete, masonry including brick and block work, cement render, polystyrene foam, tiles, ceramics, aluminum. Over paintable in 20mins.

### APPLICATIONS

Fill & Paint has many uses including: sealing around skirting boards, cornices, tiles (except showers), window frames, staircases, architraves, trims, wall & floorboards and coving. Sealing gaps and cracks in plastered wall and ceilings.

### FEATURES & BENEFITS

- Paintable in 20 mins
- 10% Flexibility
- Non slump
- Water clean up



Colour		Size	Item Code
White	<input type="checkbox"/>	300ml	122394

## ALL WEATHER FLEX GAP FILLER



### DESCRIPTION

All Weather Flex is a highly flexible, exterior grade, paintable acrylic gap filler that cures to form an extremely durable seal. All Weather Flex is ideal for use as a gap filler for high stress applications and for external use due to superior flexibility and high weather resistance. Very easy to apply, colourfast and waterproof once cured. Can be painted after 30 mins.

### APPLICATIONS

All Weather Flex has many uses including: sealing around window frames, window sills, skirting boards, cornices, tiles (except showers), staircases, architraves, trims, wall and floorboards and coving. Sealing gaps and cracks in plastered wall and ceilings. Excellent adhesion to multiple surfaces including wood, MDF, particle board, plywood, fibre cement sheet, plasterboard, concrete, masonry including brick and blockwork, cement render, polystyrene foam, tiles, ceramics, aluminium, weatherboard, etc.

### FEATURES & BENEFITS

- Superior flexibility
- Ideal for exterior applications
- **Weatherboard**
- High crack resistance
- Water clean up



Colour		Size	Item Code
White	<input type="checkbox"/>	300ml	129181

## UNIVERSAL BOG FILLER



### DESCRIPTION

Universal Bog is a heavy duty, high quality two-part repair filler with excellent adhesion on a wide range of surfaces for internal and external use. Universal Bog will not shrink or rot and is fully waterproof and has good gap filling properties. Fast setting, can be sanded after 20mins and once cured it can be cut, trimmed, chiseled, painted, screwed, drilled and nailed.

### APPLICATIONS

Ideal to repair gaps, cracks, holes, dents or replacing damaged or missing sections of timber, architraves, cavities, concrete & masonry, window frames, metal, aluminum, most plastics (pre-test), fiberglass, building sheets, tiles, etc.

### FEATURES & BENEFITS

- Wide range of application on a variety of surfaces
- Repairs gaps, cracks, holes and dents
- Smooth and easy to apply
- Does not shrink, slump or sag
- **Will not rot and remains waterproof**



Color		Size	Item Code
Ivory	<input type="checkbox"/>	750 g 1.5 kg	132560 132561

## LIGHT SPEED FILLER



### DESCRIPTION

Light Speed Filler is a high quality, rapid drying, lightweight filler which does not shrink and is used for the filling and sealing of pinholes, drill holes, gaps and cracks in walls and ceilings made from timber, plaster, drywall panels, concrete, brick and other porous substrates.

### APPLICATIONS

Suitable to use on filling holes and cracks in plaster, concrete, drywall panels. Filling and repair of gap and cracks, drill holes, screw holes in wall and ceilings. Shrink-free finishing of seams on decorative profiles.

### FEATURES & BENEFITS

- Ready mixed
- Does not shrink
- **Rapid drying**
- Light weight
- Easy to clean with damp cloth



Color		Size	Item Code
White	<input type="checkbox"/>	250 mL 900 mL	132673 132672



Add a touch...  
... of **GENIUS !**



## GENIUS GUN

- Unique easy control applicator nozzle
- No gun needed
- Re-usable for up to 6 weeks
- One handed operation
- Accurate application







## GAP FILLING EXPANDING FOAM



### DESCRIPTION

Polyurethane expanding foam with a specially designed patented trigger mechanism ensuring precise dosage and removing the need for an additional gun. It is easy to use and can be operated with one hand. Reusable up to 6 weeks after the first application. The expansion of the foam makes it the ideal gap filler. The foam is an excellent thermal and acoustic insulator that sticks to practically all building materials such as brick, concrete, insulation materials, pipes, cables, ducts, wood, metals and plastics (except PP, PE, PTFE and silicones).

Expands to approximately 30 times size of can, moisture curing, water resistant, excellent thermal insulator (better than many other insulation materials), sound reducing, extremely light, champagne colour, chemically inert once cured, resistant to temperatures from -40°C to +90°C. Fast curing. Skins over in about 5 to 10 minutes depending on conditions. 3 cm bead cures in about 1 ½ hours depending on conditions. Does not shrink or expand once cured. Not UV resistant.

### APPLICATIONS

Ideal for quick and easy filling of gaps, joints, holes, pipe penetrations,... Perfect for improving thermal and acoustic insulation and eliminating drafts or thermal bridges. Does not affect building materials including electric cables. Can be cut, sanded, painted, plastered or covered with sealant when cured. Cover in order to protect from UV light for longer life. Internal and external use.

### FEATURES & BENEFITS

- Fills & Insulates
- Re-usable for 6 weeks
- One handed operation
- Accurate trigger control
- Multipurpose



One hand operation



Accurate



Re-usable



Colour		Size	Item Code
Champagne		750ml	130373
Champagne		500ml	132272





## FLEXIBLE INSULATION FOAM



### DESCRIPTION

Polyurethane based construction foam with a specially designed patented trigger mechanism ensuring precise dosage and removing the need for an additional gun. The foam cures to become fully flexible, making it the ideal insulating gap filler as it is capable to absorb the movement of the substrates without cracking. Genius Gun Flexible Insulation Expanding Foam is an excellent thermal and acoustic insulator which bonds to practically all building materials such as brick, concrete, PVC, timber, insulation materials, pipes, cables, ducts, metals and many other plastics (except PP, PE, PTFE and silicones).

Expands to approximately 30 times the size of the can, moisture curing, water resistant, excellent thermal insulator (better than many other insulation materials), absorbs sound, extremely light weight once cured, fully flexible. The typical blue color distinguishes the product from other types of PU Foams.

### APPLICATIONS

Insulation and filling of expansion joints, filling of joints between wall panels, filling of openings between window frames and the surrounding constructions, filling of wall cavities, holes, pipe penetrations. Perfect for improving thermal and acoustic insulation and for eliminating thermal bridges or draft. Does not affect building materials including cables and insulation panels. Can be cut, sanded, plastered or covered with a sealant once fully cured. Cover in order to protect from UV for longer life. Internal and external use.

### FEATURES & BENEFITS

- **Remains flexible to absorb building movement**
- Excellent insulator
- Re-useable for 6 weeks
- One handed operation
- Accurate trigger control



One hand operation



Accurate




Re-useable



Colour		Size	Item Code
Blue		750ml	130425

# FIXES, BONDS AND SEALS EVERYTHING TO EVERYTHING

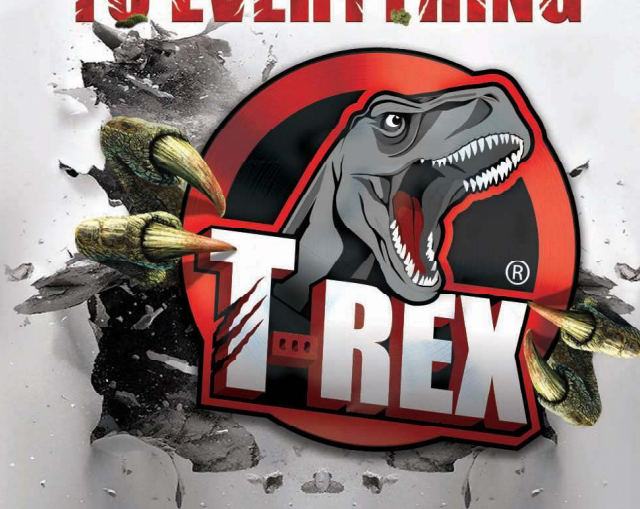

[www.trexpower.com.au](http://www.trexpower.com.au)

**SOUDAL**



## T-REX® POWER – FAST GRAB



### DESCRIPTION

T-Rex Power Fast Grab is the most versatile adhesive / sealant on the market with a 1 second immediate grab. It is based on the unique SMX® Polymer technology developed by Soudal. T-Rex Power Fast Grab has good UV resistance and elasticity. It can be sanded and instantly painted with most types of paint. It has outstanding bonding strength. T-Rex Power Fast Grab once cured forms a strong, flexible, waterproof seal and is water potable so suitable for contact with drinking water (Steel Grey Only). T-Rex Power Fast Grab is free of solvents, isocyanates or acids and is non-hazardous and non-toxic. Due to its Fast Grab it can be used for applications where an immediate grab and no slump are required. Perfect for installing heavy items such as mirrors and signs onto vertical surfaces without slipping.

### APPLICATIONS

T-Rex Power Fast Grab fixes, bonds and seals everything to everything. It can be used for all applications where a waterproof, flexible, and very strong adhesive / sealant is required. It is mould resistant for bathrooms and kitchens and neutral curing so non-corrosive on metal for roofs, gutters and mirrors. Non-bleeding so can be used with all natural stone.

### FEATURES & BENEFITS

- High green strength and quick build up of end strength
- Combines high stiffness with very high bond strength
- Bonds to wet surfaces
- Remains flexible / elastic
- Does not contain isocyanates, solvents



Colour		Size	Item Code
Bright White		290ml 600ml	121968 127507
Steel Grey	 	290ml	121970
Jet Black		290ml	124435
Beach Sand		290ml	128463
Quick Silver		290ml	128462







## T-REX® POWER - CRYSTAL



### DESCRIPTION

T-Rex Power Crystal is the most versatile transparent adhesive / sealant on the market. It is based on the unique SMX® Polymer technology developed by Soudal. T-Rex Power Crystal has good UV resistance and elasticity. It can be sanded and instantly painted with most types of paint. It has outstanding bonding strength. T-Rex Power Crystal once cured forms a strong, flexible, waterproof seal. It can be used for applications both internal and external and bonds to the widest range of substrates, T-Rex Power Crystal can be used for damp / wet surfaces.

### APPLICATIONS

Due to its high translucency it can be used for invisible bonding of glass in interior applications. T-Rex Power Crystal is mould resistant for bathrooms and kitchens and neutral curing so non-corrosive on metal for roofs, gutters and mirrors. T-Rex Power Crystal is free of solvents, isocyanates or acids and is non-hazardous and non-toxic.

### FEATURES & BENEFITS

- **100% crystal clear**
- Paintable immediately
- Solvent free
- Mould resistant
- Interior and exterior



Colour		Size	Item Code
Crystal	<input type="checkbox"/>	290ml	121969

## T-REX® POWER - TURBO



### DESCRIPTION

T-Rex Power Turbo is the fastest flexible adhesive on the market with a strong bond on porous surfaces in thin layer after only 20 minutes. It will fully set after 3 hours. It is based on Soudal's unique SMX® Polymer technology. Once cured it has outstanding bonding strength. T-Rex Power Turbo once cured forms a strong, flexible, waterproof bond. It can be used for applications both internal and external and bonds to the widest range of substrates. T-Rex Power Turbo can be used for damp and wet surfaces.

### APPLICATIONS

T-Rex Power Turbo is neutral curing so non-corrosive on metal for roofs, gutters and mirrors. Non-bleeding so can be used with all natural stone. T-Rex Power Turbo is free of solvents, isocyanates or acids and is non-hazardous and non-toxic. Due to its fast curing speed is ideal for applications where super-fast bonding is required.

### FEATURES & BENEFITS

- Fixed in 20 mins
- **Ultimate bond strength in 3 hrs**
- Permanently flexible
- Very high final strength
- Interior and exterior



Colour		Size	Item Code
White	<input type="checkbox"/>	290ml	128371



## T-REX® POWER – WALL & FLOOR



### DESCRIPTION

T-Rex Power Floor & Wall is a white, pre-mixed, ready to use, high quality adhesive for full surface bonding for all materials to all surfaces. Based on SMX® Polymer technology, chemically neutral and fully elastic. Permanently flexible, high strength adhesive. Suitable for interior and exterior use. Paintable. Non staining and safe with natural stone. Repositionable.

### APPLICATIONS

Suitable for horizontal and/or vertical bonding for all kinds of porous and non porous materials such as brick, natural stone, metals, concrete, plasterboard, cement sheeting, wood, cork, enamel, ceramic and porcelain tiles, glass, mosaics, mirrors, carpet, vinyl, masonry, PVC and synthetics (except for PE, PP and PTFE). Perfect for difficult installation: wet surfaces, tile on tile, natural stone, stainless steel and floor coverings.

### FEATURES & BENEFITS

- **Outstanding bond strength**
- Can be used for all materials and all surfaces
- Easy to trowel
- Remains flexible / elastic
- Does not contain isocyanates, solvents



Colour		Size	Item Code
White	<input type="checkbox"/>	4kg	222125

## SOUDAPRIM DP



### DESCRIPTION



A deep priming polymer dispersion with a plasticizer, a flow controlling agent and preservation additives. It is fast-drying through water evaporation, ready to use and solvent free. The very fine particles making it a sealer, and its very low viscosity, give it a higher penetrating capacity compared to other primers. Soudaprim DP penetrates completely in the substrate, resulting in a higher cohesive strength of the latter. Once applied on a level surface and cured, it can be coated with a liquid membrane such as Soudagum LM.

### APPLICATIONS

Primer for liquid waterproofing membrane. For porous substrates or substrates in gypsum. Fast drying. As a primer before application of a waterproofing membrane on indoor floor and wall surfaces that are porous substrates like concrete, cement, gypsum boards, cement sheet, etc.

### FEATURES & BENEFITS

- Can be over coated in just 1 hour
- **Deep penetration nano-particles**
- High coverage
- Strengthens substrate
- Bind dust

Colour		Size	Item Code
Red		1l	126575
Red		5l	126574

## SOUDAGUM LM



### DESCRIPTION




Soudagum LM is a polymer dispersion with mineral fillers, a plasticizer, a flow controlling agent and preservation additives. It is a fast-drying, ready to use, solvent free, thixotropic paste. Once applied on a level surface and cured, it will cure into a flexible membrane.

### APPLICATIONS

Liquid waterproofing membrane for internal wet areas such as bathrooms, showers and laundries over concrete, cement renders, gypsum boards. Flexible and resistant membrane for the waterproofing of indoor floor and wall surfaces of wet rooms with temporary standing water, which will be covered by ceramic tiles. The surfaces should not be subject to constant immersion or rising damp. To be applied before the installation of ceramic tiles.

### FEATURES & BENEFITS

- Re-coat in 4 hours
- **Tile over in 12 hours**
- Permanently elastic
- Waterproof
- Ideal for trade and DIY

Colour		Size	Item Code
White		1,3kg	126582
White		4kg	126581
White		13kg	126580






## SOUDATAPE RANGE

### DESCRIPTION


Soudatapases are a part of the watertight sealing systems of Soudal in combination with elastic liquid membranes such as Soudagum LM. The product is intended for the sealing of pipes and drains in bathrooms and showers. The product can be used horizontally and vertically.

### RANGE


**Soudatapases ST** is a sealing tape for the floor / wall and the wall / wall junctions – 10 lineal metres per box.



**Soudatape IC** is a preformed tape for placement in the inside corners, pack includes 2 pcs of inside corners.



**Soudatape OC** is a preformed tape for placement in the outside corners, pack includes 2 pcs of outside corners.



**Soudatape PD** are preformed cuffs for placement around pipes and drains, pack includes 2x100mm + 1x150mm cuffs.



Colour	Size	Item Code
Soudatape ST	120mm x 10m	126579
Soudatape IC	L 2x120mm W 150mm	126578
Soudatape OC	L 2x105mm W 150mm	126577
Soudatape PD	2x 100mmx100mm 1x 150mmx150mm	126576



## SMX-30 PLUS ADHESIVE



### DESCRIPTION

SMX-30 PLUS is the strongest flexible adhesive available. A solvent, and water-free universal timber flooring adhesive based upon SMX® Polymers. Suitable for bonding many types of timber floors onto suitable indoor substrates. SMX-30 PLUS cures by means of a chemical reaction within the adhesive. Once fully cured (12- 24 hrs. at 21°C and 50% RH) an elastic and non-shrinking adhesive layer is formed, which is resistant to moisture and heat.

The adhesive has excellent adhesion to most common substrates used in the construction industry. SMX-30 PLUS contains no water or solvents, minimising the risk of deforming the timber to a minimum. Suitable for subfloors with a residual moisture content up to 6% without the use of a moisture barrier due to the unique sealing capabilities.

### APPLICATIONS

Suitable for indoor bonding of all types of wooden floors such as solid, stab, pre-finished, and on-end parquet, wood-planks up to 18cm wide, wood-block and laminates. Suitable for use on porous and non-porous substrates such as mosaic, concrete, screeds, wood, chipboard, existing ceramic tiles, including floors with underfloor heating. SMX-30 PLUS is also extremely suitable for bonding moisture sensitive wood onto moderately porous surfaces.

### FEATURES & BENEFITS

- Rapid cure & build up of final strength
- Walk on after 2 hr, sand after 12 hrs
- Forms stable peaks once applied
- High final bond strength
- Free of isocyanates, solvents & water
- **2:1 - Moisture barrier and timber floor adhesive**



Colour		Size	Item Code
Light Oak		18kg (3x6kg foil bag)	120626
Light Oak		600ml	120625

## PUROCOL EXPRESS



### DESCRIPTION


Purocol Express is a transparent ready to use universal construction adhesive based on polyurethane with a very high end strength. A rigid adhesive with fast strength build up that foams during the curing process to fill gaps in uneven surfaces. Highest water resistance D4. For best performance substrates should be clamped for 60 minutes.

### APPLICATIONS

Interior applications which are exposed to high relative humidity. Exterior applications which are exposed to direct weather influence. Bonding of windows and door frames (also corner connections) which need to meet class D4 according to EN204. Bonding of wooden construction elements. Bonding of insulation materials including polystyrene.

### FEATURES & BENEFITS

- Fast strength build up
- **Water resistant D4**
- Very high strength
- Short Clamp time of 1 hour
- Has long open time of 15 min

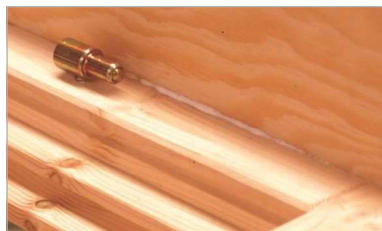

Colour		Size	Item Code
Translucent		310ml	112524

## CONTACT ADHESIVE 110 LQ



### DESCRIPTION

110 LQ Contact Adhesive is a ready to use brush/trowel grade, solvented contact adhesive based on polychloroprene rubber. It contains 22% solid content. 110LQ Contact Adhesive has great holding strength and does not require clamping to hold the materials.


### APPLICATIONS

110 LQ Contact Adhesive is suitable for bonding different materials like metals, rubber, leather, cork, plastic, wood, felt, etc., on various type of surfaces.

Apply with a notched trowel or brush on both side of the surface that need to be glued. If the surfaces are absorbent, apply a second layer (approx. 20 min) after the first layer. Wait 10 - 15 mins to dry. Joint both parts together. Push firmly and use a roller or a mallet to press firmly.

### FEATURES & BENEFITS

- High initial tack
- Fast build-up of end strength
- High adhesive strength
- Moisture resistant
- **High heat resistance >100° C**

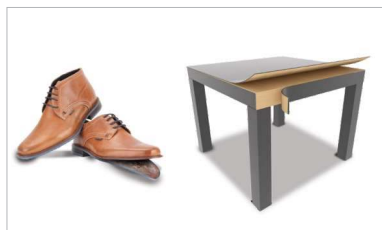

Color		Size	Item Code
Dark Amber		1 L	131189
Dark Amber		5 L	131190



## SOUDABOND EASY – GENIUS GUN



### DESCRIPTION

Soudabond Easy Genius Gun is a fast curing hand held PU Adhesive with a specially designed patented trigger mechanism ensuring precise dosage and removing the need for an additional gun. It is easy to use, can be operated with one hand and is re-usable up to 4 weeks later. In addition to its strong bonding performance the adhesive will foam up to allow filling and insulation of gaps, cracks, joints and cavities.


### APPLICATIONS

Bonding of insulation materials. Installation and bonding of drywall panels. Building of non-load bearing walls made from AAC blocks and other types of building blocks. Bonding of timber subfloors to timber or metal joists. General bonding applications where a construction adhesive would normally be used. Due to its foaming performance also suitable for filling and insulating gaps, cracks, joints and cavities.

### FEATURES & BENEFITS

- Covers 14m<sup>2</sup>
- 1 can = 25kg bag of masonry or AAC adhesive
- 30% faster installation
- No mixing
- Easy to control and re-usable for up to 4 weeks



Colour		Size	Item Code
Orange		750ml	130426

## SOUDABOND EASY CLICK & FIX



### DESCRIPTION

Soudabond Easy Click & Fix is a fast curing PU Adhesive fitted with Soudal's patented Click & Fix Adaptor for ultimate ease of use. In addition to its strong bonding performance the adhesive will foam up to allow filling and insulation of gaps, cracks, joints and cavities.

### APPLICATIONS

Bonding of insulation materials. Installation and bonding of drywall panels. Building of nonload bearing walls made from AAC blocks and other types of building blocks. Bonding of timber subfloors to timber or metal joists. General bonding applications where a construction adhesive would normally be used. Due to its foaming performance also suitable for filling and insulating gaps, cracks, joints and cavities.

### FEATURES & BENEFITS

- Covers 14m<sup>2</sup>
- 1 can = 25kg bag of masonry or AAC adhesive
- 30% faster installation
- No mixing
- Accurate trigger control



Colour		Size	Item Code
Orange		750ml	121398
Click & Clean - Clear		500ml	102080
Gun – Blue		NA	110226

## MULTI TOOL – SEALANT CUTTER



### DESCRIPTION

Easy to use universal scraper to remove old sealant joints. Made out of special material to avoid damage to the surface. Can be used 3 different ways, by pushing, pulling and scraping.

### FEATURES & BENEFITS

- Very sharp
- Re-useable
- Easy to use



Colour	Size	Item Code
Red	NA	119352

## SILICONE REMOVER



### DESCRIPTION


Gel which helps in the removal of cured joints based on silicone, hybrid and SMX® Polymer sealants.

### FEATURES & BENEFITS

- Fast working
- Re-usuable
- Comes with brush and scraper

Colour	Size	Item Code
NA	100ml	102853

## SAFETY CUTTER



### DESCRIPTION

Professional cartridge knife for opening cartridges and cutting off nozzles. With rustproof and replacement blade.

### FEATURES & BENEFITS

- Tool and blade made in Germany
- Cuts open cartridges
- Trims nozzles to desired length and angle



Colour	Size	Item Code
Red	NA	119171



## SWIVELLING NOZZLES



### DESCRIPTION

Equipped with a part you can twist so it is possible to seal in tight spaces.

### FEATURES & BENEFITS

- Twists to all angles from straight to 90°
- Great for tricky spots
- Comes with screw on cap



Colour		Size	Item Code
NA		NA	117773

## 45 DEGREE NOZZLES



### DESCRIPTION

Packet of 5 connectors to place cartridge nozzles on 45°.

### FEATURES & BENEFITS

- Can be used on all plastic, cardboard and most aluminium cartridges
- Easy to use
- Works with standard and extra long nozzles



Colour		Size	Item Code
NA		NA	103002

## EXTRA LONG NOZZLES



### DESCRIPTION

Packet of 5 extra long nozzles 175mm.

### FEATURES & BENEFITS

- Can be used on all plastic, cardboard and most aluminium cartridges
- Easy to use
- Great for tricky spots



Colour		Size	Item Code
NA		175mm length	102992

## SOUDAFIX CA1400



### DESCRIPTION

High performance, two-component anchoring resin for the pressure-free securing of anchoring rods, studs, reinforcing bars, threaded collars, profiles, etc. in structural and high load applications.

### APPLICATIONS

Suitable for various solid and hollow materials, such as concrete, cracked concrete, solid brick, hollow brick, porous concrete, natural stone, plasterboard walls, etc.

### FEATURES & BENEFITS

- Easy to use and apply
- Can be applied with standard caulking gun
- **Fast cure and styrene free (low odour)**
- Can be used in wet drill holes, even underwater
- Watertight and impermeable fixing



Colour		Size	Item Code
Mid Grey		280ml	125539
Mid Grey		165ml	125538

## SOUDAFIX VE400-SF



### DESCRIPTION

A two-component anchoring resin for the pressure-free securing of threaded rods (ETA: M8-M30), studs, reinforcement bars (ETA: Ø8-Ø32), threaded collars, profiles etc in various solid and hollow materials, such as cracked and uncracked concrete, solid brick, hollow brick, porous concrete, natural stone, plasterboard walls, etc. Soudafix VE400-SF has a fire resistance class of F120 and has a high resistance to chemicals.


### APPLICATIONS

Securing of heavy loads in solid and hollow building materials. Pressure free anchoring even close to edges. Can be used as repair mortar.

### FEATURES & BENEFITS

- High compression strength
- **High fire resistance F120**
- Easy to use and apply
- Fast cure and styrene free
- Can be used in wet drill holes, even underwater



Colour		Size	Item Code
Mid Grey		380ml	117475
Soudafix Application Tool		NA	103265



# SOUDAL

Expert in sealants, foams and adhesives

Soudal Australia  
29 Prince William Dr  
Seven Hills NSW 2147  
Tel.: 1300 50 70 11  
Fax: 1300 04 97 81  
E-mail: [soudalinfo@soudal.com.au](mailto:soudalinfo@soudal.com.au)



03 5821 7277

Proud sponsor of

